

Chlorine, Fluorine, Oxygen...Krytox™ Lubricants Are Safe for Use with Reactive Chemicals

Product Information

With a heritage of over 200 years in producing, handling, and safely transporting chemicals, Chemours knows from first-hand experience that chemical industry systems require lubricants that help support operational safety. Krytox™ performance lubricants do just that, with a broad selection of specially formulated synthetic oils and greases.


Krytox™ lubricants, including the NRT line of oils and greases, were developed to satisfy the special needs of the chemical industry. Krytox™ lubricant features include:

- Safe, non-reactive, nonflammable use with reactive chemicals
- Effective lubrication to extend equipment use-life and save maintenance
- No auto-ignition at temperatures up to 482 °C (900 °F) in oxygen
- No ignition at pressures up to 350 bar
- Non-toxic, non-corrosive, and compatible with most seal, O-ring, and valve polymers used in chemical manufacturing
- Maintain lubricity and stable viscosity throughout a wide range of temperatures in highly corrosive environments
- Chemically and biologically inert and silicone-free
- Unaffected and non-reactive to acidic or caustic cleaners, as well as disinfectants, steam, moisture, and high temperatures
- Approved for use in valves, fans, pumps, agitators, reactors, centrifuges, and other components

Independently studied and tested by companies and organizations, such as BOC, Air Liquide, BAM, NASA, and General Dynamics, Krytox™ lubricants have been confirmed as compatible for use with oxygen and other reactive chemicals.

Examples of Chlorine and Chemical-Related Applications

- Krytox™ 1506 vacuum pump fluid is used for improving the long-term reliability of pressure gauges on chlorine piping systems used in TiO₂ manufacturing
- Krytox™ GPL 105 oil is used to lubricate the moving parts of valves used to prevent leaks of TiCl₄, a toxic chemical
- The Chlorine Institute rates Krytox™ lubricants a “1” (safe for use) in chlorine and other chemical reactivity for both gas or liquid, wet or dry chlorine applications
- Krytox™ oil is used as a barrier fluid in pump and reactor seals to keep hazardous process fluids in the vessel
- Krytox™ GPL 204 grease is used to help improve the performance of anhydrous ammonia pumps by lubricating lip seals on positive displacement pumps; thereby, eliminating shaft wear and doubling seal life
- Krytox™ greases are typically used in bearing, valve, seal, and O-ring applications, and as a pipe thread sealant in reactive environments

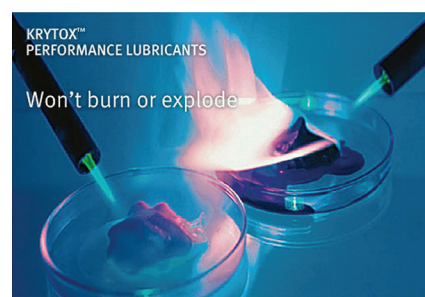

The information set forth herein is furnished free of charge and based on technical data that Chemours believes to be reliable. It is intended for use by persons having technical skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Because conditions of product use are outside our control, Chemours makes no warranties, express or implied, and assumes no liability in connection with any use of this information. As with any material, evaluation of any compound under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate under or a recommendation to infringe any patents.

NO PART OF THIS MATERIAL MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF CHEMOURS.

For product information, industry applications, technical assistance, or global distributor contacts, visit krytox.com or within the U.S. and Canada, call 1-844-773-CHEM/2436 or outside of the U.S., call 1-302-773-1000.

© 2015 The Chemours Company FC, LLC. Krytox™ and any associated logos are trademarks or copyrights of The Chemours Company FC, LLC. Chemours™ and the Chemours Logo are trademarks of The Chemours Company. Replaces: K-24285-1 C-10073 (7/15)