



Galden®



SOLVAY

asking more from chemistry®

Galden® HT PFPE

Heat Transfer Fluids

**SPECIALTY
POLYMERS**

Galden® HT PFPE

Heat Transfer Fluids

Solvay Specialty Polymers offers a safe Heat Transfer (HT) media for demanding applications, including:

- Semiconductor
- Chemical
- Pharmaceutical
- Vapor phase heating
- Transformer and super computer cooling
- Recirculating chillers
- Nuclear


Galden® HT PFPE are inert, dielectric and high-performance heat transfer fluids with boiling points ranging from 55 °C to 270 °C. This range is broader than other fluorinated heat transfer fluids and enables PFPE to be used at end-use temperatures up to 290 °C.

Features


Benefits

Excellent thermal and chemical stability	No corrosion or reaction with construction materials
Good compatibility with materials	No formation or decomposition residues No circulating pump seizure due to fluid degradation or corrosion
Good heat transfer performance	Good temperature control
Grades with wide range of boiling point	Wide choice of grades to optimize performance
High boiling point with low pour point and low viscosity	High boiling grades reduce evaporation losses without affecting performance
Low evaporation losses	Low costs of ownership
No flash or fire points No explosion hazards No toxicity No auto-ignition point	Safe to use at high temperature Enhanced safety

Suggested operating temperature range

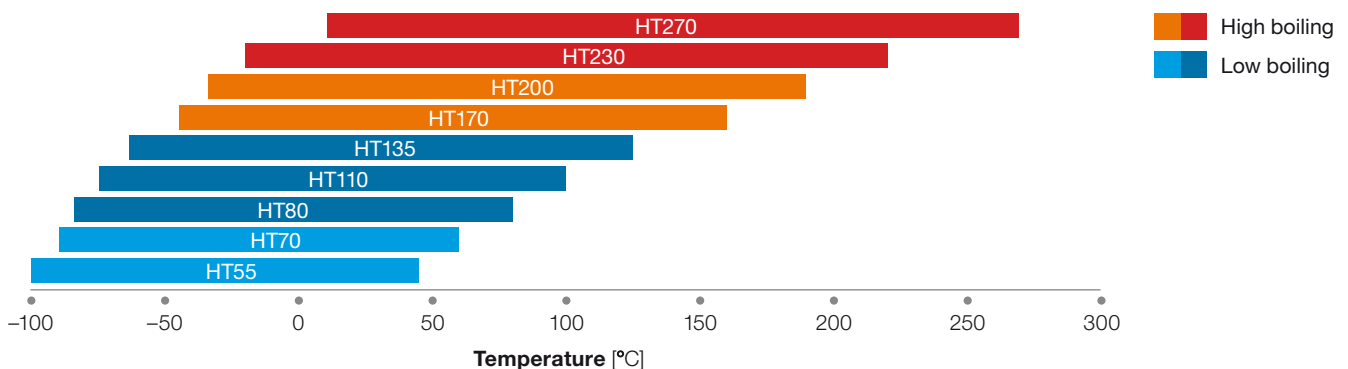

Kinematic viscosity vs. temperature

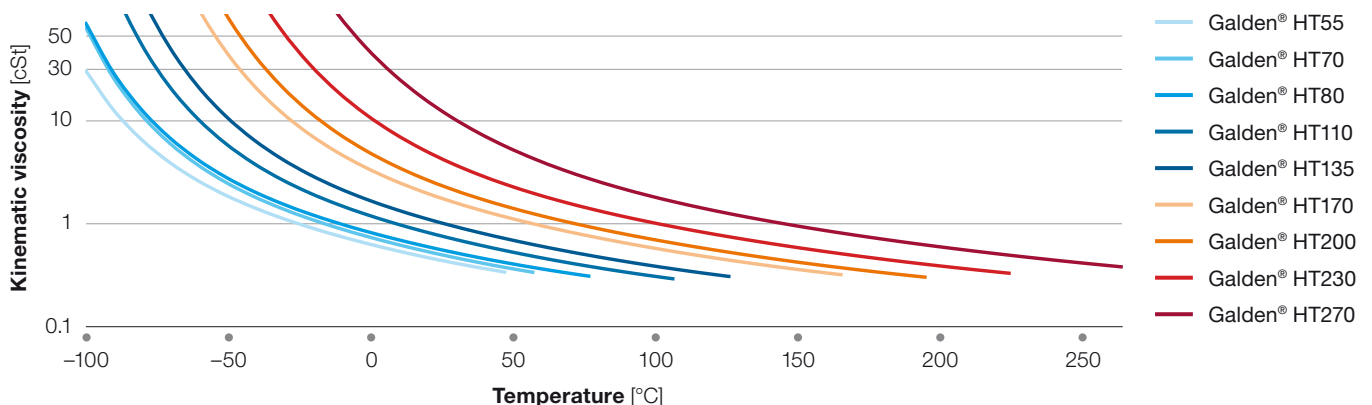

Properties	Units	Low Boiling					High Boiling			
		HT55	HT70	HT80	HT110	HT135	HT170	HT200	HT230	HT270
Boiling point	°C	55	70	80	110	135	170	200	230	270
Pour point	°C	<-125	<-110	-110	-100	-100	-97	-85	-77	-66
Density	g/cm ³	1.65	1.68	1.69	1.71	1.72	1.77	1.79	1.82	1.85
Kinematic viscosity	cSt	0.45	0.50	0.57	0.77	1.00	1.80	2.40	4.40	14.00
Vapor pressure	torr	225	141	105	17	5.8	0.8	0.2	0.03	<10-2
Specific heat	cal/g·°C	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23
Heat of vaporization at boiling point	cal/g	22	17	17	17	16	16	15	15	15
Refractive index	-	1.280	1.280	1.280	1.280	1.280	1.280	1.281	1.283	1.283
Coefficient of thermal expansion	cm ³ /cm ³ ·°C	0.0011	0.0011	0.0011	0.0011	0.0011	0.0011	0.0011	0.0011	0.0011
Surface tension	dyne/cm	14	14	16	16	17	18	19	19	20
Thermal conductivity	W/m·K	0.065	0.065	0.065	0.065	0.065	0.065	0.065	0.065	0.065
Dielectric strength	kV (2.54 mm gap)	40	40	40	40	40	40	40	40	40
Dielectric constant	-	1.86	1.86	1.89	1.92	1.92	1.94	1.94	1.94	1.94
Volume resistivity	Ohm·cm	1·10 ¹²	1·10 ¹⁵	1.5·10 ¹⁵	1.5·10 ¹⁵	1.5·10 ¹⁵	1.5·10 ¹⁵	6·10 ¹⁵	6·10 ¹⁵	6·10 ¹⁵
Average molecular weight	amu	340	410	430	580	610	760	870	1,020	1,550
Dissipation factor (1 KHz)	-	2·10 ⁻⁴	2·10 ⁻⁴	2·10 ⁻⁴	2·10 ⁻⁴	2·10 ⁻⁴	2·10 ⁻⁴	2·10 ⁻⁴	2·10 ⁻⁴	2·10 ⁻⁴
Solubility of water	ppm(wt)	14	14	14	14	14	14	14	14	14
Solubility of air	cm ³ gas/ 100 cm ³ liquid	26	26	26	26	26	26	26	26	26

All values determined at 25 °C unless otherwise specified


Galden® High Boiling (HB)

Galden® HT High Boiling is a line of dielectric fluids with boiling points ranging from 170 °C to 270 °C. These high performance fluids are a family of heat transfer fluids engineered for high temperature applications. Thanks to their high boiling point, they offer a significantly lower evaporation rate than that of low boiling point fluids.

Galden® HB fluids can also be used at moderate temperatures to replace fluids with higher evaporation rates, thereby reducing evaporation losses.

Evaporative loss comparison

According test method JIS C2101 (after 8 hrs at 40 °C)

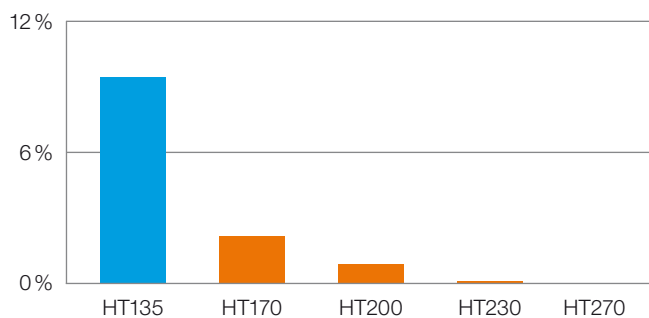

Compatibility

Galden® HT PFPE fluids are compatible with the following materials:

Metals	Plastics	Elastomers
AISI 316, Copper, Brass, Iron, Nickel, Aluminum, Stainless steel, Bronze	PE low density, Polypropylene, Polycarbonate, ABS copolymer, Polyphenyloxyde, PET, POM, PTFE, PVC, PMMA	Butyl rubber, NBR, EPDM, Natural rubber, Silicone rubber, Fluorosilicone

Seals and gaskets compatibility

More than 99 % of plasticizers used in the polymer industry are hydrocarbon-based compounds. Galden® HT PFPE fluids do not contain hydrogen in their chemical structure, so no affinity with hydrocarbon-based compounds is present.

Safety

Galden® HT PFPE fluids offer favorable environmental and worker safety properties: no toxicity, non-flammability, Zero Ozone Depletion Potential (ODP).

The chemical inertness and non-corrosivity of Galden® HT PFPE fluids make them safe for workers to handle.



Specialty Polymers

Worldwide Headquarters

SpecialtyPolymers.EMEA@solvay.com

Viale Lombardia, 20
20021 Bollate (MI), Italy

Americas Headquarters

SpecialtyPolymers.Americas@solvay.com

4500 McGinnis Ferry Road
Alpharetta, GA 30005, USA

Asia Headquarters

SpecialtyPolymers.Asia@solvay.com

Building 7, No. 899, Zuchongzhi Road
Zhangjiang Hi-Tech Park
Shanghai, 201203, China

www.solvay.com

Material Safety Data Sheets (MSDS) are available by emailing us or contacting your sales representative. Always consult the appropriate MSDS before using any of our products.

Neither Solvay Specialty Polymers nor any of its affiliates makes any warranty, express or implied, including merchantability or fitness for use, or accepts any liability in connection with this product, related information or its use. Some applications of which Solvay's products may be proposed to be used are regulated or restricted by applicable laws and regulations or by national or international standards and in some cases by Solvay's recommendation, including applications of food/feed, water treatment, medical, pharmaceuticals, and personal care. Only products designated as part of the Solviva® family of biomaterials may be considered as candidates for use in implantable medical devices. The user alone must finally determine suitability of any information or products for any contemplated use in compliance with applicable law, the manner of use and whether any patents are infringed. The information and the products are for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right.

All trademarks and registered trademarks are property of the companies that comprise the Solvay Group or their respective owners.
© 2013, Solvay Specialty Polymers. All rights reserved. R 08/2013 | Version 2.0 Brochure design by ahlersheinel.com